

# KBZ®

www.folangsiforklift.com

## ELECTRIC PALLET TRUCK

电动托盘搬运车

KBZ® KBZ® KBZ® KBZ® KBZ® KBZ® KBZ® KBZ® KBZ® KBZ® KBZ® KBZ®

### New Small Superman / 新款小超人

## SMALL SUPERMAN

### CBD15-P

DC 1500Kg

- ▶ Fork fit for double-deck pallet.
- ▶ Separately excited motor, Strong climbing ability.
- ▶ Stepless speed control system, easy to operate.
- ▶ Battery easy to replacement.
- ▶ Built-in charger is standard.
- ▶ Sealed batteries free of maintenance, safe operation and no pollution.
- ▶ Small body, suitable for narrow space.
- ▶ Automatic lifting limit, safety, energy saving.
- ▶ Emergency reversing device and Emergency brake switch.
- ▶ Low noise low energy consumption Every day only 2KWh

- ▶ 货叉进出双面托盘设计;
- ▶ 他励驱动电机, 爬坡力强;
- ▶ 无极调速, 操作简单、方便;
- ▶ 电池更换便捷;
- ▶ 标配内置充电机;
- ▶ 免维护蓄电池, 安全无污染;
- ▶ 整车外形小巧, 适合狭窄空间作业;
- ▶ 起升自动限位, 安全、节能;
- ▶ 标配紧急反向装置, 紧急制动开关;
- ▶ 低噪音、低能耗, 每天仅需 2 度电。



Electric Pallet Truck Expert

# KBZ®

www.folangsiforklift.com

## ELECTRIC PALLET TRUCK

电动托盘搬运车

KBZ® KBZ® KBZ® KBZ® KBZ® KBZ® KBZ® KBZ® KBZ® KBZ® KBZ® KBZ®



### SPECIFICATION

详细说明

		Unit	
Feature 特性	Model 型号		CBD15-P
	Configuration No. 配置号		170G
	Load capacity 额定载重	kg	1500
	Load center 载荷中心距	mm	600
	Wheel basenter 轴距	mm	1301
Wheels 车轮	Operating type 操作类型		Walkie
	Wheels type 车轮类型(前/后)		PU
	Wheel quantity Driving wheel/Balance wheel/Bearing wheel 驱动轮/平衡轮/承重轮数量		1/1/0/4
	Driving wheel size 驱动轮尺寸	mm	252 × 67
	Bearing wheel size 承重轮尺寸	mm	84 × 70 Double Pulley
Dimension 尺寸	Balance wheel size 平衡轮尺寸	mm	/
	Lowered fork height 货叉最低离地高度	mm	85
	Max. lifting height 货叉最大起升高度	mm	205
	Max. lifting Route 最大起升行程	mm	120
	Outside width between forks 货叉外侧间隙	mm	550/600/650/685
	Inside width between forks 货叉内侧间隙	mm	230/280/330/365
	Fork Length 货叉长度	mm	1150/1200
	Fork width 货叉宽度	mm	160
	Fork thickness 货叉厚度	mm	55
	Overall length 整车全长	mm	1707
	Overall width 车体宽度	mm	697
	Overall height(with handle) 整车高度(含手柄)	mm	1181
	Overall height(without handle) 整车高度(不含手柄)	mm	714
	Min.Turning radius 最小转弯半径 踏板收起/放下	mm	1547
	Min.Aisle width for pallets 800 × 1200 最小直角堆垛通道宽度	mm	1920
Min.Aisle width for pallets 1000 × 1200 最小直角堆垛通道宽度	mm	1953	
Performance 性能	Travel speed,laden/unladen 最大行驶速度 满载/空载	km/h	3/3.5
	Lift speed,laden/unladen 最大起升速度 满载/空载	mm/s	56/60
	Travel speed,laden/unladen 最大下降速度 满载/空载	mm/s	57/59
	Gradeability,laden/unladen 爬坡速度 满载/空载	%	5/7
Electrical configuration 电气配置	Drive motor 驱动电机	KW	DC0.63
	Lift motor 起升电机	KW	DC 0.8
	Battery voltage/capacity 蓄电池电压/容量	KW	24/70
	Brake 制动	V/Ah	Electromagnetic/Regenerative
Weight 重量	Controller 控制器型号		HELI
	Battery weight 蓄电池重量	kg	48
	Service weight with battery 自重(包含蓄电池)	kg	275

### DIMENSION DRAWING

外形尺寸图

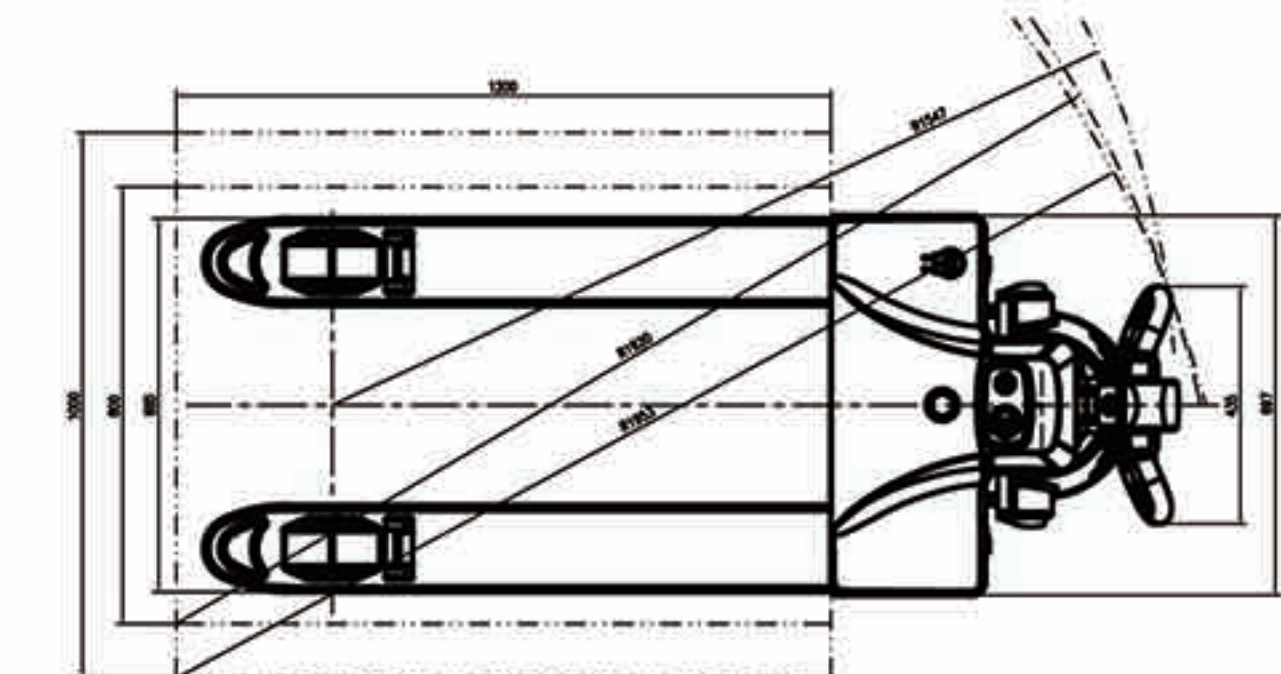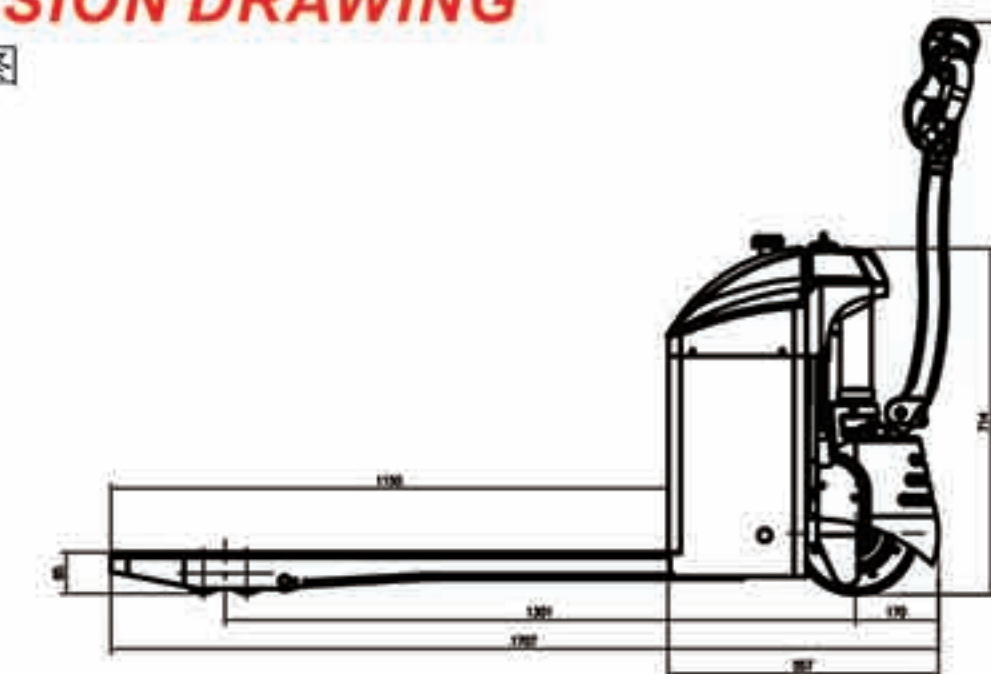

FOLANGSI MACHINE CO., LTD.

Tel.:020-39993595 Fax:020-39993597

E-mail:admin@folangsiforklift.com

# KBZ®